


AP-0404-5MP-P-H1

ACTIVE pixelTM
safety made easier

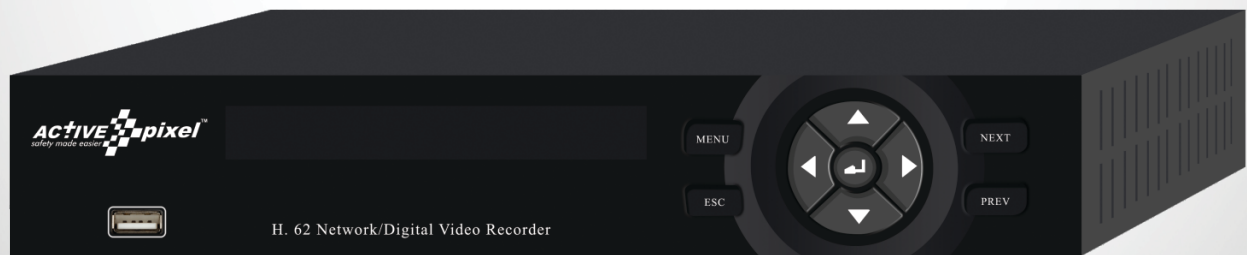

Key Features

- 4CH 1U 5MP, Video Compression H.264+
- DVR 4*5MP@11fps-AHD,IPC+TVI+CVI+AHD+CVBS(5in1/XVR)
- Video Output: 1CH VGA, 1CH HDMI upto (Max 4K)
- Audio In: 4CH RCA, Audio Out: 1CH RCA
- Full Channel 5MP Resolution Recording
- SyncPlayback: 4CH, Audio In/Out: 4/1
- 1*SATA (6TB), 2 USB Ports(2.0), 1 RS485, 1 RJ45

AP-0404-5MP-P-H1



Feature	Specification
Processor	Embedded processor
Operating System	Embedded LINUX
IP Camera Input	4+2 Channel, each channel up to 5MP
Two-way Talk	Reuse audio in/out, RCA
User Interface	GUI
Video Input	4 channel, BNC
Video Output	1 HDMI (up to 3840 x 2160), 1 VGA
Video Standard	NTSC(525Line, 60f/s), PAL(625Line, 50f/s)
Compression	H.264+/H.264
Video Resolution	5MP, 1080P, 720P, 960H, D1, HD1, BCIF, CIF, QCIF
Audio Input	1 channel, RCA
1 channel, RCA	1 channel, RCA
Motion Detection	MD Zones: 396 (22 × 18)
Video Loss	supports
Camera Blank	supports
Hard Disk	1 SATA port, up to 6TB
Smart Phone	iPhone, iPad, Android Phone
Trigger Events	Recording, PTZ, Tour, Video Push, Email, FTP, Snapshot, Buzzer and Screen Tips
Recording Mode	Manual, Schedule (Regular, Continuous), MD (Video detection: Motion Detection, Video Loss, Tampering), Alarm, Stop
Search Mode	Time /Date, Alarm, MD and Exact Search (accurate to second)
Playback	Play, Pause, Stop, Rewind, Fast play, Slow Play, Next File, Previous File, Next Camera, Previous Camera, Full Screen, Repeat, Shuffle, Backup Selection, Digital Zoom
Backup Mode	USB Device / Network
Interface Ports	1 HDMI, 1 VGA, 1 RS485, 2 USB Ports (1 USB 2.0 , 1 USB 3.0)
Record Interval	1 ~ 60 min (default: 60 min), Pre-record: 1 ~ 30 sec, Post-record: 10 ~ 300 sec
Max User Account	128 users
Ethernet	1 RJ-45 Port (1000M)
Protocols	HTTP, TCP/IP, IPv4/IPv6, UPnP, RTSP, UDP, SMTP, NTP, DHCP, DNS, IP Filter, PPPoE, DDNS, FTP, Alarm Server, P2P, IP Search, ONVIF 2.42, CGI Conformance
Power Supply	DC12V/2A
Power Consumption	<15W (Without HDD)
Working Temp	-10 ~ +55°C / 10~90%RH